


Tools Required:
4mm hex key



Dimensions
A: 13-5/8 "
B: 3 "
C: 76-1/2 "

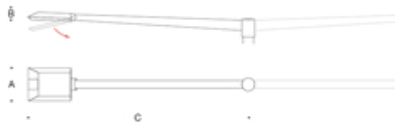

Protection Class: IP66

- Notice to Installer for 77 732:**
- 1. See page 2 for specific product safety warnings.
 - 2. For pole top applications only.
 - 3. Slip fits 3" O.D. poles only.
 - 4. LED module and integral driver provided by BEGA.
 - 5. Pole top luminaire supplied with 35 feet of cable to route through pole.

- 77 732 - installation:**
- 1. Lead luminaire wires into top of pole and through to the base.
 - 2. Secure luminaire head to pole by securing outer 4mm set screw on luminaire housing.
 - 3. Make supply wiring and luminaire wiring connections inside pole base:
MAIN VOLTAGE SUPPLY WIRE TO BLACK LUMINAIRE WIRE
NEUTRAL (COMMON) SUPPLY WIRE TO WHITE LUMINAIRE WIRE
GREEN GROUND WIRE TO GREEN LUMINAIRE WIRE
Dimming (if applicable):
DIMMING CONTROL WIRE (+) TO POSITIVE LUMINAIRE DIM CONTROL WIRE
DIMMING CONTROL WIRE (-) TO NEGATIVE LUMINAIRE DIM CONTROL WIRE
 - 4. Replace access door and secure.

Relamping/Maintenance No relamping necessary.	Accessories Please refer to the appropriate accessory installation sheet for further instruction when applicable.	Replacement Parts	
		<u>Description</u>	<u>Part No</u>
Lamp: 62.8W LED Module		LED Driver	(x2) 75985-03
		LED Module (3000K)	(x4) LED-0282/830
		LED Module (4000K)	(x4) LED-0282/840

Product Safety Warnings:

CAUTION - RISK OF FIRE. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED. SUITABLE FOR WET LOCATIONS.

MIN 60°C SUPPLY CONDUCTORS.

ATTENTION - RISQUE D'INCENDIE, CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS. CONVIENT AUX EMPLACEMENTS MOUILLÉS.

LES FILS D'ALIMENTATION 60°C MIN.